

Exo-Life Finder (ELF): A Hybrid Optical Telescope for Imaging Exo-Earths

Astrobiology Science Strategy for the Search for Life in the Universe National Academies of Sciences, Engineering, and Medicine

White Paper, January 2018

Lead contact: Kuhn, J.R., IfA, University of Hawaii, USA / PLANETS Foundation, USA

kuhn@ifa.hawaii.edu, 34 Ohia Ku St, Pukalani, HI, 96790

Contributors: Berdyugina, S.V., KIS, Freiburg, Germany / PLANETS Foundation, USA

Apai, D., Astrobiology, Arizona State University, USA
Berdyugin, A.V., Tuorla Observatory, Turku University, Finland
Catling, D.C., Astrobiology, University of Washington, USA

Darnell, T., Deep Astronomy, USA Diamond, B., SETI Institute, USA

Emilio, M., Ponta Grossa University, Brazil / PLANETS Foundation, USA

Finster, K., Microbiology, Aarhus University, Denmark

Gedig, M., Dynamic Structures Ltd., Canada

Grenfell, J.L., DLR Institute of Planetary Research, Germany

Halliday, D., Dynamic Structures Ltd., Canada Harlingten, C. SearchLight Observatories, Canada

Jefferies, S.M., Physics & Astronomy, Georgia State University, USA

Klupar, P., Breakthrough Prize Foundation, USA

Kagitani, M., PPARC, Tohoku University, Japan / PLANETS Foundation, USA

Krissansen-Totton, J., Astrobiology, University of Washington, USA

Langlois, M., CNRS, ULyon, ENS de Lyon, France / PLANETS Foundation, USA

Lewis, K., PLANETS Foundation, USA

Marchis, F., SETI Institute, USA Mennesson, B., JPL, NASA, USA

Minardi, S., AIP, Potsdam, Germany

Moretto, G., CNRS, ULyon, ENS de Lyon, France / PLANETS Foundation, USA

Norton, A.P., Physics, Stanford University, USA

Okano, S., PPARC, Tohoku University, Japan / PLANETS Foundation, USA

Pedretti, E., AIP, Potsdam, Germany

Piirola, V., Tuorla Observatory, Turku University, Finland

Ritter, J., IfA, University of Hawaii, USA / PLANETS Foundation, USA Sakanoi, T., PPARC, Tohoku University, Japan / PLANETS Foundation, USA

Santl-Temkiv, T., Microbiology, Aarhus University, Denmark

Shostak, S., SETI Institute, USA Tarter, J., SETI Institute, USA

Worden, S.P., Breakthrough Prize Foundation, USA

Summary

Finding and studying life in the Universe beyond the solar system is an ultimate goal of astrobiology. This objective requires dedicated new technology. Here we describe an opportunity to discover extrasolar life (exolife) within 10 years. Our paper presents a new concept for a hybrid telescope-interferometer, the Exo-Life Finder (ELF), that can directly image Earth-size water-bearing planets in the optical and IR within tens of light years from the Sun. High-contrast direct imaging of exo-Earths is a holy grail of optical-IR remote sensing that will allow the measurement of biosignatures and exoplanetary reflected light. Inversions of such light curves will yield wavelength-dependent albedo surface maps of potentially unambiguous signals of exoplanetary life, from single-cell photosynthetic organisms to advanced life-forms. Such data may even provide technomarkers of civilizations through heat-island signatures or artificial mega-structures on the planetary surface and its near-space. The ELF ground-based telescope consists of between nine to twenty-five large (4-8m) off-axis telescopes assembled on a common pointing structure. The primary mirror segments have identical off-axis parabolic shapes, and are served by corresponding adaptive secondary mirrors, each creating a diffraction-limited image with high-accuracy wavefront control. The synthesized point-spread-function (PSF) created by image-combining and properly phasing the ELF segments can produce a 10⁻⁷ contrast dark spot that can be moved, shaped, and achromatized within the field-of-view (FOV) by modifying segment phases. ELF's narrow FOV and hybrid technology reduce its cost by a factor of 10 compared to general-purpose extremely large Keck-era telescopes. Current ELF concept studies, involving expert engineering groups, like Dynamic Structures (currently designing other Extremely Large Telescopes 'ELTs'), suggest that ELF can be built within 7 years. On a cost scale of \$100M (less than the cost of a small NASA mission) ELF could vield a statistically valuable census of life on nearby exoplanets. As a dedicated telescope for detailed exoplanet characterization, its first targets will include Proxima b, Ross 128 b, Alpha Cen A and B, as well as dozens of stars and planetary systems in the solar neighborhood.

1. Why ELF?

Currently planned ELTs are optimized for relatively wide-field general astronomy and will not necessarily address many exoplanetary science goals. We believe the rapidly growing field of exoplanetary science justifies a dedicated narrow-FOV instrument that is capable of high-contrast direct imaging in the optical and infrared. **ELF is a hybrid interferometric telescope, that will be sensitive to exolife biosignatures from many near-by extrasolar planets.** It will image Earth-size planets and acquire high signal-to-noise ratio (SNR) continuous reflected light curves at 0.3–5µm within the next decade.

The integration time needed at fixed SNR in direct exoplanet photometry scales faster than D⁻⁴ (where D is telescope aperture) and depends critically on exquisite wavefront control (reaching rms wavefront errors of a few nanometers) for high contrast. As a narrow-FOV optic ELF may combine interferometric concepts with a relatively "floppy" mechanical structure to significantly decrease the moving mass and cost per m² of light collecting aperture while realizing extremely high photometric dynamic range. These ELF advantages make comparable-aperture space-based systems non-competitive in both cost and time-to-realization.

An ELF with an effective aperture of at least 20 m will fulfill an astrobiology strategic goal to sensitively search for life beyond the Solar system. It will, for example, allow detailed exoplanet albedo maps to be inferred from light curves in various spectral bands. This dedicated

telescope may also "see" exo-Earth oceans, continents, and colonies of surface life like extremophiles and vegetation as well as deserts, volcanos, polar caps (see Fig. 1), and even civilization heat-islands and artificial megastructures on the surface and in the near-exoplanetary space [1,2]. It may detect O₂, O₃, CO₂, CH₄, H₂O and other biosignature gases and habitability markers, disequilibrium biosignature gas pairs, organic haze in anoxic atmospheres [3], and photosynthetic and non-photosynthetic pigments [4,5].

ELF will be capable of characterizing atmospheres and surface bulk composition of the nearest m-dwarf exoplanet Proxima b [6], and over a period of a few months it will map its surface (and/or clouds) which may harbor life. Obtaining surface maps in multiple wavelengths will provide spatially resolved spectra of surface features that will allow for geologic and biologic studies of the planetary surface (Fig. 1). ELF will easily reveal and characterize Earth-size (and larger) planets in the Alpha Centauri A and B system, thus expanding the number of nearest exoplanets for detailed studies. Finally, ELF will deliver time series of albedo maps of all exoplanets (from Earth- to Jupiter-size) within 25 light years (up to V=13^m, Fig. 2). It will create the first complete census of exo-life on nearby exoplanets and will allow weather, seasons, geological and biological activity studies on a meaningful sample of exoplanets.





Figure 1. Example of an exo-Earth with an ice polar cap, ocean, and continents with deserts and vegetation. An Earth-like map is used to simulate reflected light curves in four Figure 2. Number of detectable exoplanets map is a three-color image inferred using light- the desert composition (on the right). [1].



passbands within 0.4–0.8 μm . The recovered (SNR \geq 5, V \leq 13 m , 4h exposure) depending on low-scattered-light hybrid telescope curve inversion. Spectra of two surface patches aperture in BVR bands (solid lines) and reveal vegetation "red-edge" and a typical comparable estimates for a Keck-like telescope (K50-800) with 50-800 segments.

2. ELF Design Concepts

The technology for building a powerful exoplanet "imager" that exceeds the capabilities of Keck-era telescopes already exists. With minimal additional development, we can force the cost per aperture area down by an order of magnitude, so that an ELF could be built for less than the cost of a small NASA explorer mission. Such a ground-based telescope for direct imaging exoplanet studies depends on five design principles [7,8]: 1) the effective aperture should be large, 2) the subapertures should also be as large as practical while accounting for wavefront and

diffraction control, 3) the moving mass must be minimized, 4) there must always be a relatively bright star in the FOV, so that wavefront control for phasing and adaptive optics can be performed accurately, 5) the synthesized optical PSF should yield a practical diffraction minimum in the FOV, so that the effect of residual wavefront errors does not spoil high dynamic range photometry. These principles and the ELF concept naturally lead to a "scalable" optical system design.

ELF's intrinsically narrow FOV and its fundamental requirement for a bright central star allow an optical system that is similar to the phased-array radars that create "synthetic" PSFs, but in this case the phasing and wavefront control are achieved with a closed-loop system that uses the exoplanet's near-point-like host star as a guide. Many elements of this strategy have been developed by the "Colossus Group" and more recently by the PLANETS Foundation [7–12]. The primary conclusions relevant for ELF are as follows:

- 1) With additive (3D printing) technologies we can create an active structure on smooth fire-polished window glass that creates "stiffness" with considerably less mass than the glass-steel backing structure of, e.g., Keck-era mirror segments [11]. Current glass technologies allow patentpending "live-mirrors" (Fig. 3) to be as large as 8m in size with an area-mass-density that approaches 1/10th of Keck-era mirrors. These optical elements could be constructed at the telescope site and would never undergo abrasive polishing.
- 2) A single moving mass for the large diffraction-limited concept (0.5m) developed by the subapertures need not be as stiff as current ELTs, if each PLANETS foundation. subaperture comes from a common parent parabolic optic shape and each independent subaperture secondary mirror provides the required adaptive and active tip/tilt/phase control. In this active/adaptive/high-Strehl telescope it is wasteful to use the mass budget to build an optical system that is "stiffer" than the intrinsic atmospheric and thermal wavefront errors that will be corrected by the active/adaptive control.
- 3) We have demonstrated how the necessary subaperture phase information can be efficiently recovered from the common-path full-aperture final image.
- 4) The moving optical support structure mass can be further minimized with a "bicycle wheellike" structure that combines pre-tensional and compressional mechanical elements.

All of these features lead to a new type of extremely large aperture telescope that has extraordinary wavefront control and a small moving mass in comparison to Keck-era optical systems.

2.1. Optical and mechanical designs

As an example, the ELF optical design in Fig. 4 combines 16 eight meter diameter off-axis "livemirror" parabolic segments with 16 elliptical secondaries in a basic Gregorian configuration. The subapertures are constructed from active "live-mirror" 6mm thick smooth no-polish glass. Each corresponding temporally fast adaptive secondary optic is about 15cm across and includes tip/tilt/piston control. The Gregorian focus provides additional articulated wavefront measurements for the temporally slow active shape control needed for the primary subapertures. The full optical system creates a final diffraction-limited Gregorian focus near the vertex of the

Figure 3. Live-Mirror proof-of-

parent optic. The narrow FOV allows for a very fast optical system (with a focal ratio less than 0.5) and a correspondingly small enclosed volume of the system moving mass.

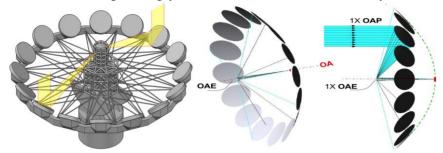


Figure 4. ELF Gregorianfocus off-axis parabolic optical configuration.

A mass-efficient mechanical design allows a 45 degrees zenith pointing distance and uses a "bicycle wheel" pretensioned moving support structure for the optical payload. Fig. 5 illustrates two concepts, one utilizes a wind fence enclosure and a telescoping central tower that allows the optical system to be lowered into a stowed position, while the second shows how separate retractable subaperture enclosures could be implemented.

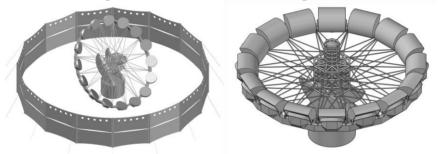


Figure 5. ELF Mechanical enclosure concepts: wind fence (left) and mirror covers (right).

2.2. Wavefront control and coronagraphy

ELF is fundamentally an adaptive/active telescope – it relies on photons from the exoplanet host star to create a high-strehl diffraction-limited PSF. Residual wavefront errors, larger than the fundamental wavefront measurement accuracy allowed by the stellar photon flux, are inevitable but their deleterious effects are minimized by an optical system with a diffraction pattern that has a dark hole in the FOV where we measure the exoplanet reflected light. ELF does not depend on a post-focus coronagraph since its synthesized "coronagraphic" PSF is created by the telescope itself. This has the important well-known advantage that the system PSF, that modulates residual wavefront errors, attenuates the photometry-limiting speckle noise near the exoplanet (i.e. "speckle-pinning" [12]). Figure 6 shows how a fixed phase introduced in each subaperture (by displacing the agile elliptical secondaries) can create a diffracted dark spot, and how the residual wavefront phase-induced intensity noise is correspondingly attenuated in the dark spot.

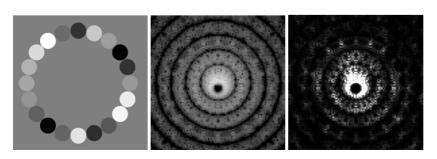


Figure 6. *Left:* Subaperture darkspot phase solution represented on 360deg linear greyscale. *Center:* PSF on log-scale 8 decades. *Right:* RMS speckle noise on log-scale 6 decades.

3. The ELF Proposal

The development of the ELF and the related Colossus and PLANETS telescopes, so far has relied on private and institutional support from Dynamic Structures Ltd., MorphOptic Inc., PLANETS Foundation, KIS, Tohoku University, CRAL/CNRS/Lyon University, and recently from the SETI institute. The ELF working group includes more than two dozen scientists and engineers. With this brief paper we seek public support for a fully vetted construction proposal over an 18-month period. The needed technology demonstrations and a detailed engineering design could be completed within a \$1.8M budget, possibly leveraged by the partner institutions, scientists, engineers, and entrepreneurs included here.

4. References

- [1] Berdyugina, S.V., Kuhn, J.R.: Surface Imaging of Proxima b and Other Exoplanets: Topography, Biosignatures, and Artificial Mega-Structures, ApJ, arXiv:1711.00185 (2017).
- [2] Kuhn, J.R., Berdyugina, S.V.: Global warming as a detectable thermodynamic marker of Earth-like extrasolar civilizations: the case for a telescope like Colossus, Int. J. Astrobiology, 14, 401 (2015).
- [3] Catling, D., Krissansen-Totton, J., Kiang, N.Y., Crisp, D., Robinson, T.D., DasSarma, S., Rushby, A., Del Genio, A., Bains, W., Domagal-Goldman, S.: *Exoplanet Biosignatures: A Framework for Their Assessment*, NExSS paper, Astrobiology, in press (2017).
- [4] Berdyugina, S.V., Harrington, D.M., Kuhn, J.R., Santl-Temkiv, T., Messersmith, E.J.: Remote Sensing of Life: Polarimetric Signatures of Photosynthetic Pigments as Sensitive Biomarkers, Int. J. Astrobiology, 15, 45 (2016).
- [5] Berdyugina, S.V., Kuhn, J.R., Langlois, M., Moretto, G., Krissansen-Totton, J., Grenfell, L., Catling, D., Santl-Temkiv, T., Finster, K., Tarter, J., Shostak, S., Marchis, F., Hargitai, H., Apai, D.: *The Exo-Life Finder (ELF) Telescope: New Strategies for Exoplanet Direct Detection, Biosignatures and Technosignatures*, SPIE AS103 (2018).
- [6] Anglada-Escudé, G., Amado, P.J., Barnes, J., et al.: A terrestrial planet candidate in a temperate orbit around Proxima Centauri, Nature, 536, 437 (2016).
- [7] Kuhn J.R., Berdyugina S.V., Langlois M., Moretto G., Harlingten C., Halliday D.: *Looking beyond 30m-class telescopes: the Colossus project*, SPIE 9145, 91451G, 8pp. (2014).
- [8] Kuhn, J.R., Moretto, G., Berdyugina, S.V., Langlois, M., Thiebaut, E.: *The Exo-Life Finder (ELF) Telescope: Design and Synthetic Beam Concepts*, SPIE AS103 (2018).
- [9] Moretto, G., Kuhn, J.R., Berdyugina, S.V., Langlois, M., Thiebaut, E., Tallon, M., Halliday, D.: *Partially filled aperture interferometric telescopes: achieving large aperture and coronographic performance*, SPIE Conf. 9906, 99062B, 12 pp. (2016).
- [10] Moretto G., Kuhn J. R., Thiébaut E., Langlois M., Berdyugina S. V., Harlingten C., Halliday D.: *New strategies for an extremely large telescope dedicated to extremely high contrast: the Colossus project*, SPIE Conf. 9145, 91451L, 9 pp. (2014).
- [11] Moretto, G., Kuhn, J.R., Capsal, J.-F., Audigier, D., Langlois, M., Thetpraphi, K., Berdyugina, S.V., Halliday, D.: *The Exo-Life Finder (ELF) Telescope: Optical Concept and Hybrid Dynamic Live-Optical Surfaces*, SPIE AS103 (2018).
- [12] Langlois, M., Moretto, G., Kuhn, J.R., Tallon, M., Thiébaut, E., Berdyugina, S.V., Norton, A.P.: The Exo-Life Finder (ELF) Telescope: New Strategies for Extreme Adaptive Optics and Cophasing for an extremely large telescope dedicated to extremely high contrast, SPIE AS106 (2018).